


MicroTouch™ ChassisTouch

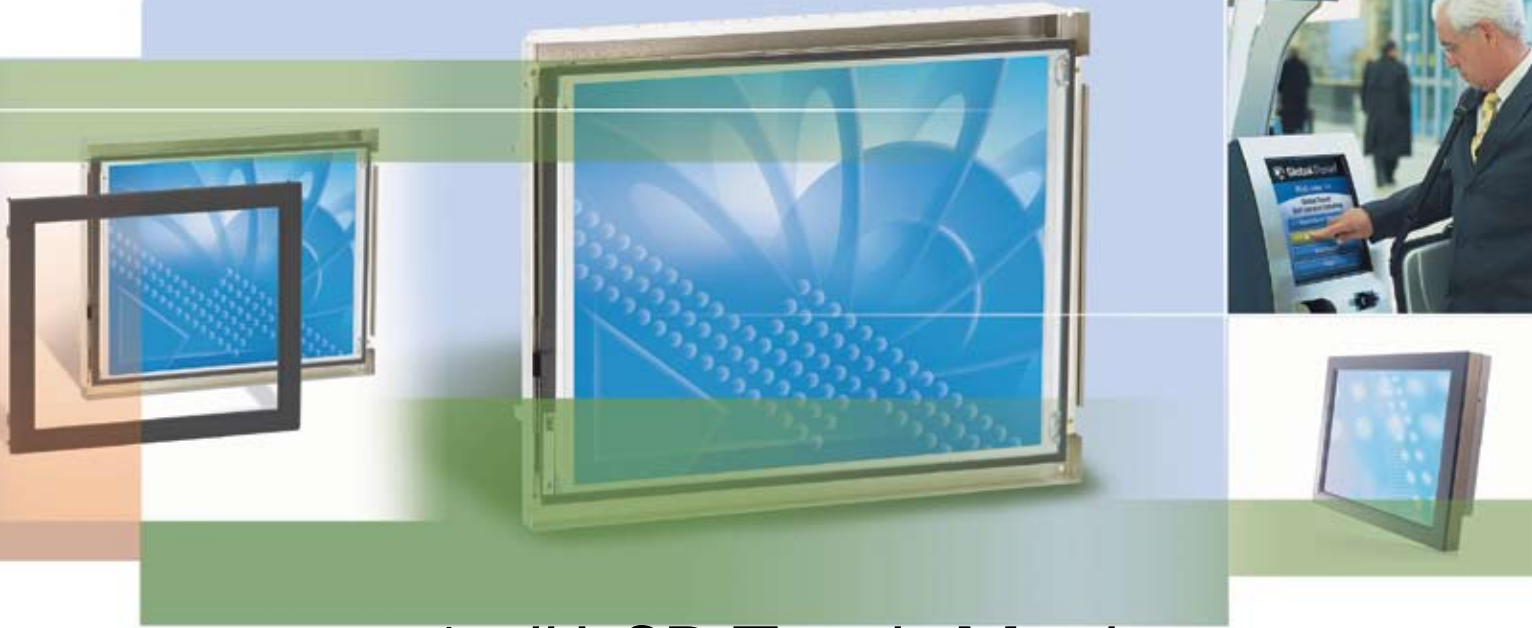

17" LCD Touch Monitor

Product Highlights

- Slim design is conducive to sleek kiosk design trends
- Robust metal enclosure provides mounting stability and protection for the LCD display
- VESA-mounting hole pattern allows for arm mount capability or bracket-mounting within the enclosure
- Bright 300 nit chassis solution
- High contrast TFT LCD panel delivers crisp, vibrant images
- Proven 3M touch technology
- 3 year warranty
- Optional bezel available

Slim, Compact Display offers Durable Touch Solution

MicroTouch™ ChassisTouch 17" LCD monitors from 3M are designed for easy integration into kiosks, industrial enclosures and other installations where compact, touch-integrated displays are preferred. ChassisTouch LCD monitors offer a more compact enclosure, better optics, lower power usage, longer life and less heat generation than CRT chassis monitors. These slim profile monitors are ideal for use in a broad range of kiosk and light industrial applications.

When space is limited, the slim metal case of the ChassisTouch LCD touch monitor is ideal. Display adjustment controls are accessible from the back even with the monitor sitting flush with the face of the enclosure. An optional bezel is available.

Making the Difference

The ChassisTouch LCD touch monitors are available with MicroTouch™ ClearTek™ II capacitive touch screen technology. ClearTek™ II provides accuracy and sensitivity to the user's touch while offering outstanding durability and resistance to contaminants such as dirt, liquids, and harsh chemicals.

MicroTouch™ ChassisTouch™ 17" LCD Touch Monitor

Functional Features 17" LCD


LCD Technology	TFT, Active Matrix
Display Colors	16.2 Million
Pixel Pitch	.264mm
Brightness with Touch Screen	300 cd/m ² (nit) typical
Brightness without Touch Screen (max.)	270 cd/m ² (nit)
Contrast Ratio	500:1 typical
Response Time	13 milliseconds
Viewing Angle*	Horizontal: +/-75 degrees typical (150 total) Vertical: +75/-60 degrees typical (135 total)
Control Type	OSD
On Screen Display Controls	Brightness, Contrast, H/V Position, Phase, Auto-adjust, Sharpness, OSDcontrol, Frequency, Utility
Maximum Resolution	1280 x 1024
Operating Environment	0 to +40 degrees C 90% relative humidity, non-condensing
Storage Environment	-20 to +60 degrees C

Physical Features

Physical Dimensions (Enclosure)(WxHxD)	405.7 x 335.1 x 49 mm 15.98 x 13.18 x 1.93 inches
Display Area (WxH)	337.9 x 270.3 mm 13.3 x 10.6 inches
Video Cable Connector	15 Pin D-Sub
Power Supply	12V DC Power Supply
Power Savings²	DPMS, VESA Compliant
Power Consumption	30 Watts Normal
Backlight Life	35,000 hrs. Typical
Weight	4.6kg/10.1 lbs
RoHS Compliant	Yes
Agency Approvals	FCC B, CE, UL/cUL
Mounting Options	2 sets of brackets, VESA 100 mm
Warranty	3 years



Rear view with VESA-mount arm



Optional bezel



ChassisTouch Monitor with optional flush bezel

(1) Brightness measured on a display with MicroTouch™ ClearTek™ II capacitive sensor.
(2) DPMS: Display Power Management Signaling for reduced power consumption during non-use.
* Viewing angle measured with contrast ratio ≥10

NOTE: Mechanical Drawings available at www.3Mtouch.com

3M Touch Systems
3M Display & Graphics
300 Griffin Brook Park Drive
Methuen, MA 01844
U.S.A.
888-659-1080
www.3M.com/touch
For more information
on 3M touch products,
call 888-659-1080

RoHS Directive compliant: In accordance with European Directive 2002/95/EC, "RoHS Directive compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based on information provided by third party suppliers to 3M. (9/06)

NOTICE: Given the variety of factors that can affect the use and performance of a 3M Touch Systems Product (the "Product"), including that solid state equipment has operation characteristics different from electro mechanical equipment, some of which factors are uniquely within User's knowledge and control, it is essential that User evaluate the 3M Touch Systems Product and software to determine whether it is suitable for User's particular purpose and suitable for User's method of application. 3M Touch Systems' statements, engineering/technical information, and recommendations are provided for User's convenience, but their accuracy or completeness is not warranted. 3M Touch Systems products and software are not specifically designed for use in medical devices as defined by United States federal law. 3M Touch Systems products and software should not be used in such applications without 3M Touch Systems' express written consent. User should contact its sales representative if User's opportunity involves a medical device application.

IMPORTANT NOTICE TO PURCHASER: Specifications are subject to change without notice. These 3M Touch Systems' Products and software are warranted to meet their published specifications from the date of shipment and for the period stated in the specification. 3M Touch Systems makes no additional warranties, express or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose. User is responsible for determining whether the 3M Touch Systems Products and software are fit for User's particular purpose and suitable for its method of production, including intellectual property liability for User's application. If the Product, software or software media is proven not to have met 3M Touch Systems' warranty, then 3M Touch Systems' sole obligation and User's and Purchaser's exclusive remedy, will be, at 3M Touch Systems' option, to repair or replace that Product quantity or software mediator to refund its purchase price. 3M Touch Systems has no obligation under 3M Touch Systems' warranty for any Product, software or software media that has been modified or damaged through misuse, accident, neglect, or subsequent manufacturing operations or assemblies by anyone other than 3M Touch Systems. 3M Touch Systems shall not be liable in any action against it in any way related to the Products or software for any loss or damages, whether non-specified direct, indirect, special, incidental or consequential (including downtime, loss of profits or goodwill) regardless of the legal theory asserted. (7/02)

